

# WL 1000 GF



## THE HIGH VOLUME SPARKLING SOLUTION



Freestanding model

Dimensions:  
W 38 cm \_ H 114 cm \_ D 34 cm

Machine Weight:  
26.7 kg



NSF/ANSI  
Standard 61



WRAS  
APPROVED  
PRODUCT



QUALITY & SAFETY  
GUARANTEED

Waterlogic International Limited reserves the right, in order to reflect continuous research and development, to amend or change specifications without prior notice. Waterlogic and the Waterlogic logo are registered trademarks in countries where the Group operates. Waterlogic International Limited is licensed to use BioCote, and BioCote logo which are registered trademarks of BioCote Ltd.

# WL 1000 GF



## MULTI FILTRATION SYSTEM



### CHOICE

Hot, Cold and Ambient Cold

### MULTI FILTRATION SYSTEM

With option for either **Reverse Osmosis** or **carbon filtration** system

### TANK CAPACITY

11 litres water reservoir

### COLD TANK CAPACITY


4 litres

### CAPACITY OF HOT WATER


1,5 litres stainless steel tank  
Up to temperature of 87° C

### COLD WATER TEMPERATURE

Adjustable from 3 to 12° C  
Cold Tank with In Tank UV System

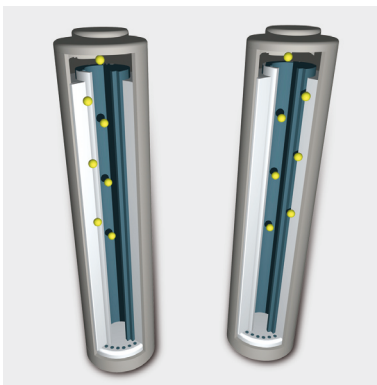

**CARBON FILTER**

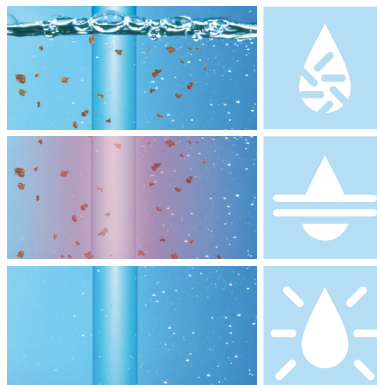


### IN TANK-UV

UV light destroys the growth of bacteria



**NEW: BioCote natural antimicrobial solution** added to all plastic parts surrounding the dispensing area inhibiting bacterial growth.



**EASY MAINS CONNECTION**

WLI Trading Limited  
Suite 4, 2nd Floor Beacon Court,  
Sandyford, Dublin 18, Ireland  
Tel: + 353 1 293 1960  
Fax: + 353 1 293 1052  
website: [www.waterlogic.com](http://www.waterlogic.com)  
e-mail: [exportsales@waterlogic.com](mailto:exportsales@waterlogic.com)

Distributed by: